T: 011 791 2664 E: sales@gwpower.co.za W: generatorwarehouse.co.za

GENERATOR WAREHOUSE
World-Class Generator Solutions

FAW 66kVA standby diesel generator

KEY SPECIFICATIONS

STANDBY POWER	66kVA
PRIME POWER	60kVA
PHASE	Three
DRY WEIGHT	1092kg
LENGTH	2250mm
WIDTH	950mm
HEIGHT	1260mm
FUEL TANK CAPACITY	280l

FEATURES & BENEFITS

- Maximum 66kVA standby power at 230/400v @ 50Hz 1500rpm
- Powerful four-cylinder, water-cooled 4DX23-78D series FAW diesel engine
- Ideal for small business applications
- Automatic changeover (ATS), maintenance free batteries and trickle charger included
- H-specification Insulation, brushless alternator with AVR provides stable output
- Easy to use digital controller with auto and manual start options
- Silent canopy which can stand outside with lockable doors
- Long range diesel tank allows for longer run times (280l)
- Four-way protection system included
- Peace of mind of earlier of one year/1000 hour warranty

STANDARD GENSET SPECIFICATIONS

*All ratings are quoted at maximum ratings at sea level and derating will be applicable for altitude and power factor.

ENGINE

FAW diesel engine
Four cylinder water cooled
Electronic fuel pump
24v DC starter and charge alternator
Replaceable fuel filter, oil filter, dry element air filter
Cooling radiator and fan
Exhaust silencer
Maintenance free battery including rack and cables

ALTERNATOR

Brushless, single bearing system, four poles
Insulation class H with circuit breaker protection
Standard degree of protection IP21
Self-exciting and self-regulating
Screen protected and drip proof
Automatic voltage regulator

CHASSIS

The complete generator set is mounted as a whole on a heavy duty fabricated, steel base frame
Steel chassis and anti-vibration pads
Base frame design incorporates an integral fuel tank
The generator can be lifted or carefully pushed/pulled by the base frame
Dial type fuel gauge on the fuel tank

CANOPY

Ventilation parts are designed with modular principles
Weather resistant and lined with sound reducing foam
All metal canopy parts are painted by powder paint
Panel window
Lockable doors on each side
Easy maintenance and operation
Easy lifting and moving
Thermally Insulated engine exhaust system
Exterior emergency stop push button

CONTROL SYSTEM

Control supervision and protection panel is mounted on the genset base frame. The control panel is equipped as follows:

AUTO MAINS FAILURE CONTROL PANEL

Control with Smartgen automatic transfer switch
420 Smartgen electronic controller
Emergency stop push button
Static battery charger
Four-pole electrically and mechanically interlocked ATS

GENERATING SET CONTROL MODULE 420 SMARTGEN FEATURES

This module is used to monitor a mains supply and automatically start a standby generating set

Shutdown alarms
STOP/RESET-MANUAL-AUTO-START

METERING VIA LCD DISPLAY

Mains volts (L-L/L-N)
Generator amps (L1, L2, L3)
Generator frequency; generator (cos)
Engine hours run; plant battery (volts)
Engine speed (rpm)
Engine temperature (°C)

AUTOMATIC SHUTDOWN AND FAULT CONDITIONS

Under/over speed; fail to start
High engine temperature; fail to stop
Low oil pressure; charge fail
Under/over generator volts; over current
Under/over generator frequency; emergency stop
Under/over mains frequency
Under/over mains voltage
Low/high battery volts

We reserve the right to change generator information without prior notice.
Information is double checked to ensure that it is correct, however we will not be held responsible for clerical errors. (E&OE)

FAW 66kVA standby diesel generator

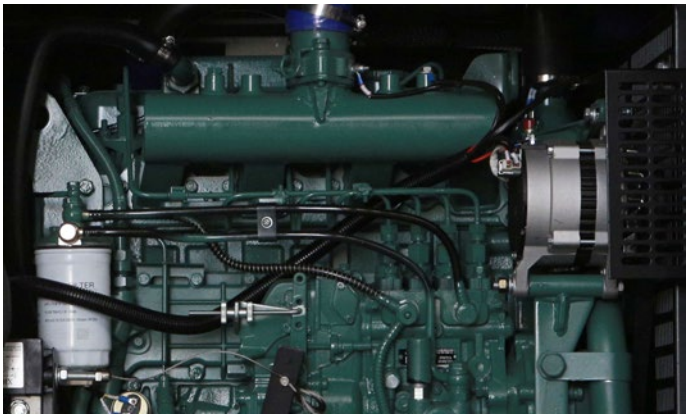

SPECIFICATIONS TABLE

ENGINE SPECIFICATIONS

Engine make	FAW
Diesel generator model	4DX23-78D
Displacement	3.86l
Cylinder bore/stroke	102mm x 118mm
Fuel system	In-line fuel injection pump
Cylinders	4
Cylinder arrangement	Vertical in-line
Engine output power	57kW
Turbocharged or normally aspirated	Turbocharged and intercooled
Cycle	Four stroke
Combustion system	Direct injection
Compression ratio	17.5:1
Fuel tank capacity	280l
Fuel consumption 100%	14.08 l/h
Fuel consumption 75%	10.56 l/h
Fuel consumption 50%	7.05 l/h
Fuel consumption 25%	3.52 l/h
Oil type	15W40
Oil capacity	13l
Cooling method	Radiator water-cooled
Coolant capacity (including radiator)	15l
Starter	24v DC
Governor system	Electronic
Engine speed	1500rpm

ALTERNATOR SPECIFICATIONS

Alternator brand	Stromer
Standby power output	66kVA
Prime power output	60kVA
Insulation class	H
Type	Brushless
Phase and connection	Three phase, four wire
AVR	Yes
AVR model	SX460
Voltage regulation	± 1%
Voltage	230/400v
Rated frequency	50Hz
Voltage regulate change	⩽ ±1%
Phase change rate	± 1%
Power factor	0.8
Protection class	IP21
Stator	2/3 pitch
Rotor	Single bearing

GENERAL SPECIFICATIONS

Structure type	Silent weather resistant enclosure
Dimensions Length x Width x Height	2250mm x 950mm x 1260mm
Dry weight	1092kg
ATS unit included	Yes

We reserve the right to change generator information without prior notice.
Information is double checked to ensure that it is correct, however we will not be held responsible for clerical errors. (E&OE)